


FLEXIBLE BEARINGS FOR TD



FLEXIBLE BEARINGS
FOR TD



**TUNG PEI
INDUSTRIAL CO., LTD.**

Taipei Head Office

10F., No. 142, Sec. 4, Zhongxiao E. Rd., Taipei City 106, Taiwan
TEL +886-2-2741-7321 FAX +886-2-2741-6623

**SHANGHAI TUNGPEI
ENTERPRISE CO., LTD.**

Shanghai Plant

No.1555, Rongle Rd.(E), Songjiang Industrial Zone, Shanghai, China
TEL +86-21-5774-4698 FAX +86-21-5774-4695

**PT. TPI
MANUFACTURING INDONESIA**

Indonesia Plant

Kawasan GIIC Blok AB No. 02, Kota Delta Mas, Desa Sukamahi Cikarang Pusat,
Bekasi 17530, Jawa Barat, Indonesia TEL + 62-21-8067-7410

Although care has been taken to assure the accuracy of the data compiled in this catalog, TPI does not assume any liability to any company or person for errors or omissions.

www.tpi.tw





BEARING NOMINAL NAME


The nominal name of the bearing is a code used to indicate the form, size, accuracy, and internal structure of the bearing.

STRUCTURAL FEATURES

The flexible bearing for strainwave drive is composed of inner ring, outer ring, ball, and retainer (Figure 1-1), which can be applied to the strainwave drive and installed on the wave generator (Figure 1-2) to act as the wave generator to transmit waveforms, and can withstand the radial load.

CAUTIONS

If this flexible bearing is a one-piece retainer, it is recommended to design a shoulder stop mechanism on the wave generator to avoid the falling off of retainer during operation. If it is a double piece retainer, please avoid interfering the retainer during installation (please consult TPI staff if any special requirements).

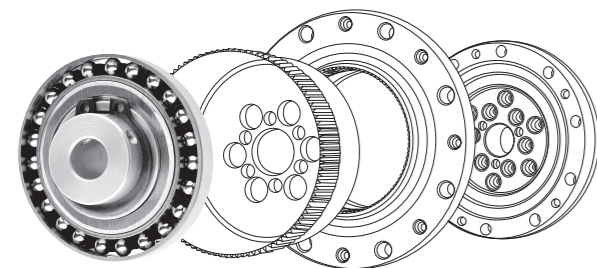

FLEXIBLE BEARINGS FOR STRAINWAVE DRIVE

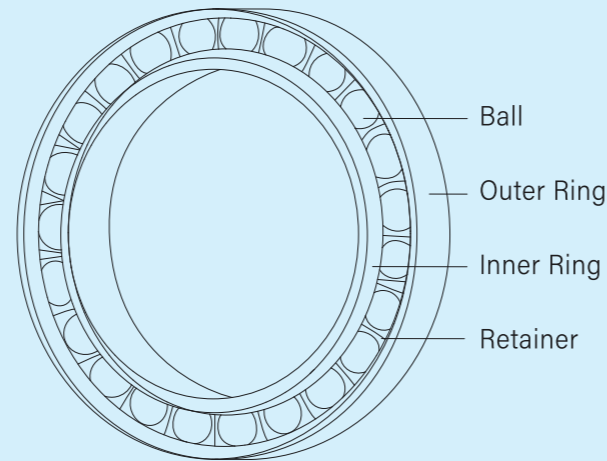


Figure 1-1 : Flexible Bearing Structure Drawing
It shows that the flexible bearing is composed of inner ring, outer ring, ball, and retainer.


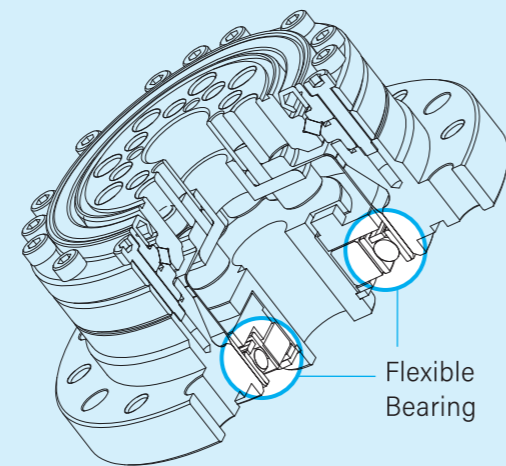


Figure 1-2: Assembly Schematic
It shows the schematic diagram of flexible bearing and strainwave drive, and the product is applied to the mechanical arm of precision robot.

ACCURACY

Bearing "tolerances" or dimensional accuracy and running accuracy are regulated by ISO and JIS B 1514 standards.

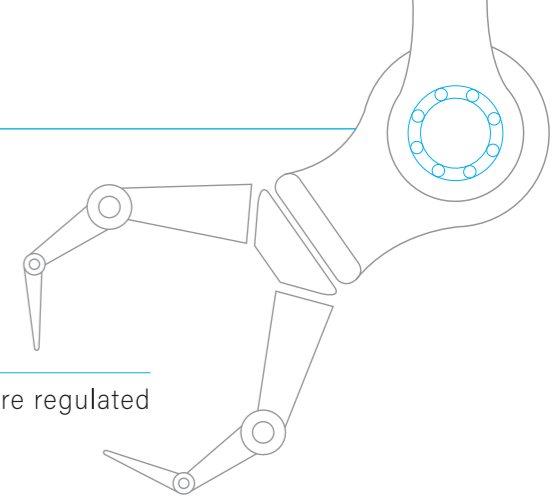

Tolerance classifications of national standards

Spec.	Applicable Tolerance Class	Bearing Type
JIS	JIS B 1514	Class 0, Class 6, Class 5, Class 4, Class 2
ISO	ISO 492	Normal Class, Class 6, Class 5, Class 4, Class 2
DIN	DIN 620	P 0, P 6, P 5, P 4, P 2
ANSI	ANSI/AFBMA Std. 20 ¹	ABEC-1 RBEC-1, ABEC-3 RBEC-3, ABEC-5 RBEC-5, ABEC-7, ABEC-9
	ANSI/AFBMA Std. 19.1	Class K, Class N, Class C, Class B, Class A
AFBMA	ANSI B 3.19 AFBMA Std. 19	Class 4, Class 2, Class 3, Class 0, Class 00
	ANSI/AFBMA Std. 12.1	-
	ANSI/AFBMA Std. 12.2	-

Note) ABEC suitable for ball bearing, RBEC suitable for roller bearing.

Note 1 : JIS B 1514·ISO 492 and DIN620 are on an equal basis.

Note 2 : There are slightly different on tolerance and allowance between JIS B1514 and AFBMA specification.

SX series

Bearing Type	Boundary Dimensions [mm]				
	d	D	B1	B2	r _{min}
SX05T01T2	25.074	33.9	6.41	6.16	0.2
SX06T01T2	33.306	41.73	6.68	6.1	0.2
SX07T01T2	35.57	49.08	8.12	7.22	0.3
SX09T01T9X	45.21	61.34	6.32	9	0.3
SX12T01T9X	58.928	79.76	8.6	11.82	0.3

